


UNDERMOUNT
SLIDE SERIES

D-MOTION

D-MOTION

Soft-close and silent system

A Smooth Drawer



- DTC D-motion undermount slide, silent and soft-close
- A complete program fitting a variety of applications with soft-close, push-open, locking device and pin mount options.
- Highly stable construction, verified durability



Quietness



Intelligence



Durability



Eco-Friendliness



D-MOTION is a strong foundation for wood drawers with a smooth running action and a stable, comfortable feel.

DTC
Dial Quality Technology

UNDERMOUNT
SLIDE SERIES
D-MOTION



Whatever the drawer size,
D-MOTION produces a smooth
running action.



Options are abundant: Locking devices or pin mount, 16-19mm drawer sides, soft-close or push-open and slide lengths for common applications. Virtually any cabinet or furniture situation can be accommodated.

DTC
Global Quality Excellence

UNDERMOUNT
SLIDE SERIES
D-MOTION



The long stroke of the soft-close dampers ensures the closing action is smooth and silent.

D-MOTION

DS10 Series Full Extension Undermount Slides with Locking Device




PRODUCT




DESCRIPTION

- Load capacity: 35kg
- Finish: zinc plated
- Length: 250-600mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down: 0-3mm, side: ± 1.5mm
- 3D adjustment, up&down: 0-3mm, side: ± 1.5mm, depth: 0-3mm
- Maximum drawer side thickness: 16mm

SPACE REQUIREMENT










PLANNING

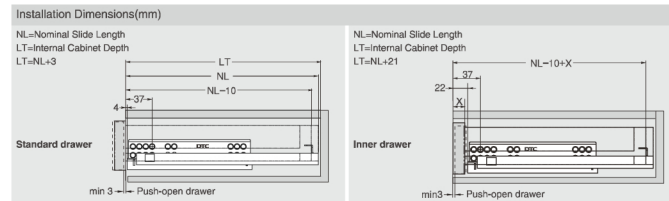

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER/SOFT CLOSE&PUSH-OPEN DRAWER

1 Slides (left/right)		Pre-zinc Steel (F02)				
NL	Soft close Item No.	Set/ctn	Push-open Item No.	Set/ctn	Soft Close+Push-open Item No.	Set/ctn
250mm	DS10250H	10	DF10250H	6		
270mm	DS10270H	10	DF10270H	6		
300mm	DS10300H	10	DF10300H	6		
350mm	DS10350H	10	DF10350H	6	FDS10350H	6
400mm	DS10400H	10	DF10400H	6	FDS10400H	6
450mm	DS10450H	10	DF10450H	6	FDS10450H	6
500mm	DS10500H	10	DF10500H	6	FDS10500H	6
550mm	DS10550H	10	DF10550H	6	FDS10550H	6
600mm	DS10600H	10	DF10600H	6	FDS10600H	6

2D Locking Device (Left/Right)		3D Locking Device (Left/Right)	
Item No.	0DSD03-A	Item No.	0DSD04-A
3 Rod for Push-open Synchronization (For cutting to size: 1100mm. Cutting internal cabinet width LW=172)		Item No. HT0FH02	

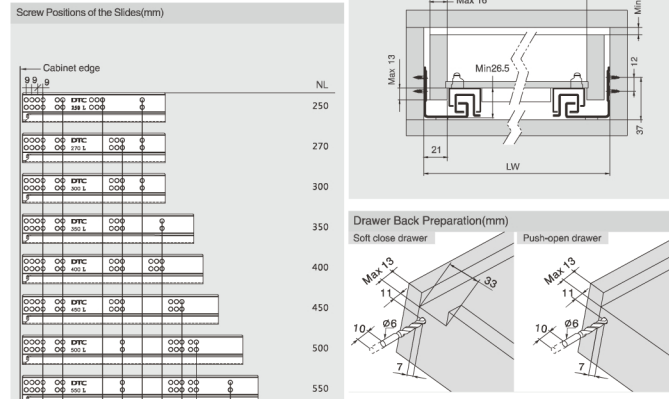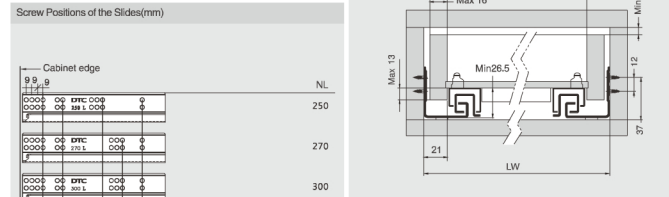


ASSEMBLY AND ADJUSTMENT


Assembly and Adjustment
(for D-MOTION Full Extension Undermount Slides)




Drawer Assembly with Locking Device



Fix the slide onto the cabinet.




Fix the locking device onto the drawer bottom.





Lay the drawer bottom onto the slide then push the drawer into the cabinet.


Removal with Locking Device




For removal, hold the handle and pull out the drawer.




Drawer Assembly with Peg



Fix the slide onto the cabinet.




Pull out the drawer member of the slide from the cabinet, lay the drawer onto the slide.






Press the locking pin into the drawer side to lock the position of the drawer.

Removal with Peg



For removal, pull out the locking pin from the drawer side. Lift the drawer and pull it out from the cabinet.

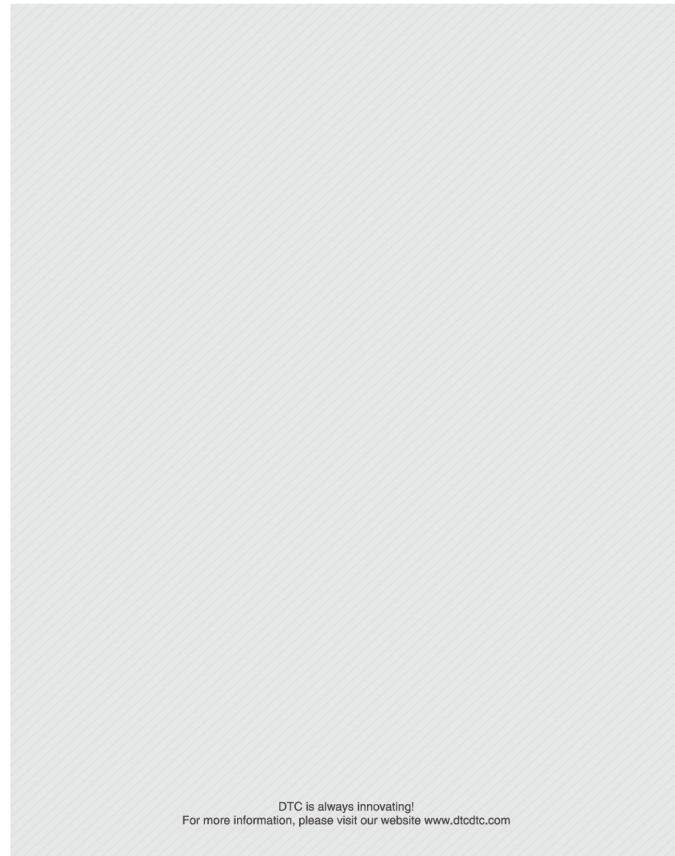

DTC is always innovating!
For more information, please visit our website www.dtcetc.com