




PRODUCT




DESCRIPTION

- Opening angle:55°
- Depth of hinge cup: 11.5mm
- Diameter of hinge cup: 35mm
- Range of door thickness: 14-26mm
- Possible drilling distances on the door(K): 3-7 mm

APPLICATION

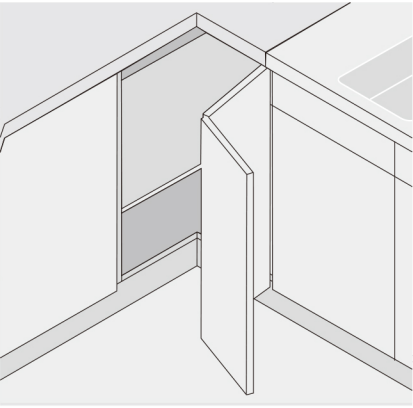

ORDER INFORMATION

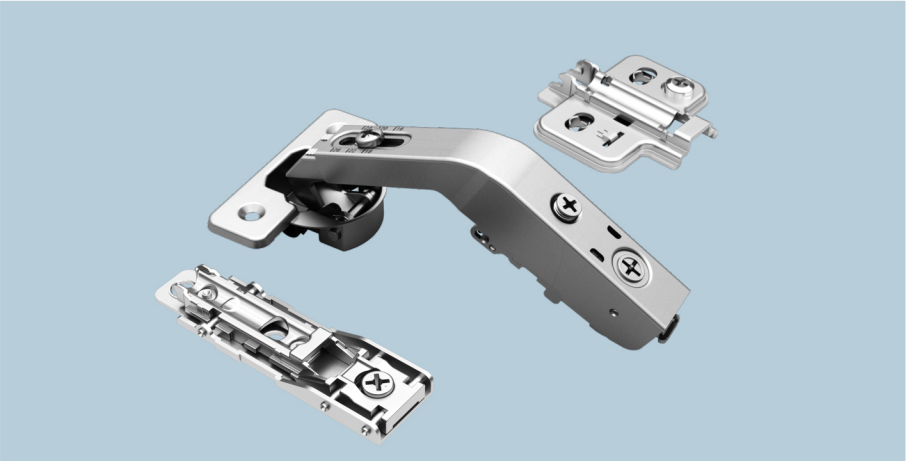

Options of screws and dowels:



M10 dowel
Dowel No:
M



Expandable
dowel
Dowel No:
K



M8 dowel
Dowel No:
N



Quick dowel
Dowel No:
T0

ANGLED DOOR AND BLIND CORNER DOOR APPLICATIONS

Blind corner door hinge applications

135°

Adjustment range of D -3 → +3

Adjustment range of L -3 → +3

Kitchen corner door applications

30°

Kitchen corner door applications

45°

Kitchen corner door applications

90°

5 7

The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Nickel plated(A01) Titanium black(A08)

C81 series anyway snap-on 135° angled hinges with spiral-cam

135°

Adjustment range of D -3 → +3

Adjustment range of L -3 → +3

Door thickness	Mounting plate height
14 ≤ T < 19	H=2
T=19	H=2
19 < T ≤ 26	H=0

Item No.	Pcs/ctn
Sprung C81H876A	200