

31100128

Installation and user's manual

CONTENT

INTRODUCTION	2-3
SAFETY PRECAUTION	2-3
INSTALLATION INSTRUCTIONS.....	4
BUILT-IN MODEL INSTALLATION.....	5
OPERATION.....	6
MAINTENANCE.....	7-8
TROUBLESHOOTING.....	9
ENVIRONMENTAL PROTECTION.....	9

INTRODUCTION

Thank you for choosing this cooker hood.

This instruction manual is designed to provide you with all required instructions related to the installation, use and maintenance of the appliance.

In order to operate the unit correctly and safely, please read this instruction manual carefully before installation and usage.

SAFETY PRECAUTION

- Never let the children operate the machine.
- The cooker hood is for home use only, not suitable for barbecue, roast shop and other commercial purpose.
- Use a damp cloth and neutral soap to clean the cooker hood after the specified time (suggestion: every 2 months), and keep the unit from danger of burning.
There is a fire risk if cleaning is not carried out in accordance with the instructions.
- Please keep the kitchen room with good convection before connecting this appliance; please check that the power supply cord is undamaged. A damaged supply cord must be replaced by qualified service personnel only.
- Regulations concerning the discharge of air have to be fulfilled.
- This appliance can be used by children aged from 8 years and above and also the persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- There shall be adequate ventilation of the room when the range hood is used at the same time as appliances burning gas or other fuels; the range hood is only intended to be installed over a hob with no more than four hob elements; The air must not be discharged into a flue that is used for exhausting fumes from appliances burning gas or other fuels

Range hoods and other cooking fume extractors may adversely affect the safe operation of appliances burning gas or other fuels (including those in other rooms) due to back flow of combustion gases.

These gases can potentially result in carbon monoxide poisoning. After installation of a range hood or other cooking fume extractor, the operation of flued gas appliances should be tested by a competent person to ensure that back flow of combustion gases does not occur.



CAUTION:

Accessible parts may become hot when used with cooking appliance.
Electrical Shock Hazard

Only plug this unit into a properly earthed outlet.
If you have doubts, seek advice from a suitably qualified engineer.


Hareware Included



Tools Required



Pencil



Hammer



Level



Measuring tape




Screwdriver



Electric drill or
powered screwdriver

Prepare for installation:

Warning: Failure to install the screws or fixing device in accordance with these instructions may result in electrical hazards.

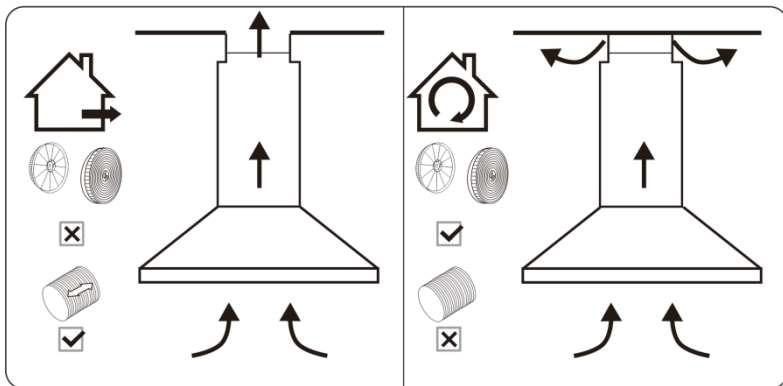


DUCTED OPTION


RECIRCULATION OPTION

a. If you have an outlet to the outside, your cooker hood can be connected as above picture by means of an pipe (with an interior diameter of 150mm).

If you don't have an outlet to the outside, you can go with recirculation mode by using carbon filter.

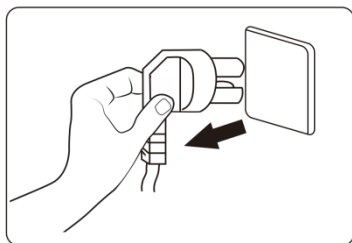


b. Before installation, turn the unit off and unplug it from the outlet.

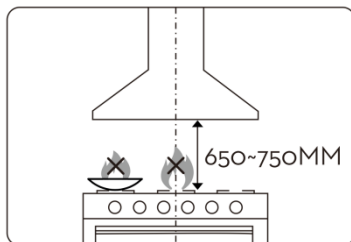


c. The cooker hood should be placed at a distance of 650~750mm above the cooktop for the best effect.

BUILT-IN MODEL INSTALLATION

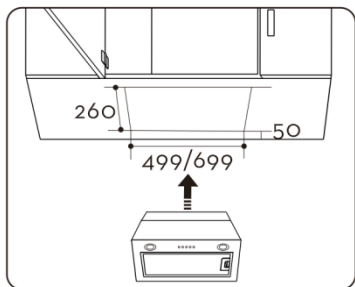


Before installation, check and make a hole on your kitchen cabinet in appropriate size to fit the hood (52cm/72cm).

Note: The width of the cabinet shall not be less than 260mm and 50mm space shall be reserved at the two ends of the opening. (As picture)

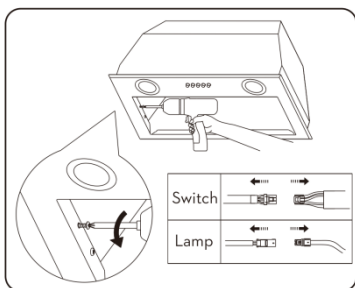

Remove the filter and loosen 2 pcs screws per left/right panel side, disconnect the lamp and switch connector and then put the panel away. (As picture)

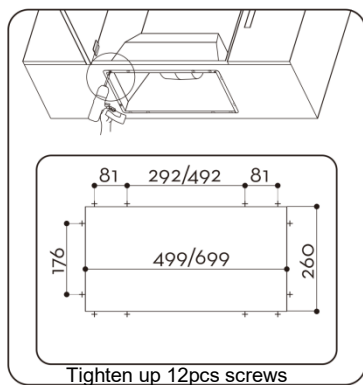

1. Fix the product body into the cabinet with 12 pcs screws.

2. connect the lamp and switch wire and fix the panel on the body and tighten 2pcs screws per left and right side,

Push Button



①

OFF Button

Turn off the fan.

①

Low Speed Button

Start the fan at low speed .

It is suitable for simmering and cooking which does not make much steam.

②

Medium Speed Button

Start the fan at medium speed.

This is ideal for ventilation during standard cooking operation.

③

High Speed Button

Start the fan at high speed.

This is ideal for ventilation when a high density of smoke or steam has been produced.



Light Button

Used for turning on/off the light.

MAINTENANCE

Before cleaning switch the unit off and pull out the plug.

I. Regular Cleaning

Use a soft cloth moistened with hand-warm mildly soapy water or household cleaning detergent. Never use metal pads, chemical, abrasive material or stiff brush to clean the unit.

II. Bulb Replacement


Switch the unit off and unplug the appliance.

CAUTION: LAMP UNIT MAY BE HOT!

WAIT UNTIL THE UNIT IS COOL. BEFORE attempting to replace the LED lamps make sure the unit is powered off and UNPLUGGED.




The Bulb/Lamp may be hot, leave it 10 minutes before replacement.

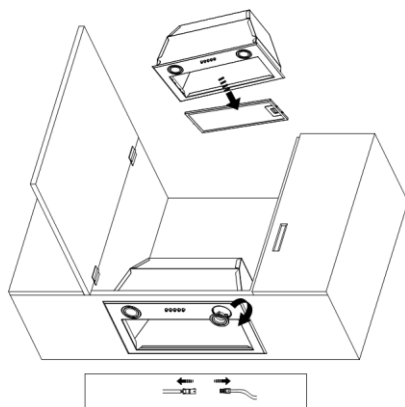

III. Aluminium and carbon filters replacement


In order to install the carbon filter, the grease filter should be detached first. Press the lock and pull it downward.

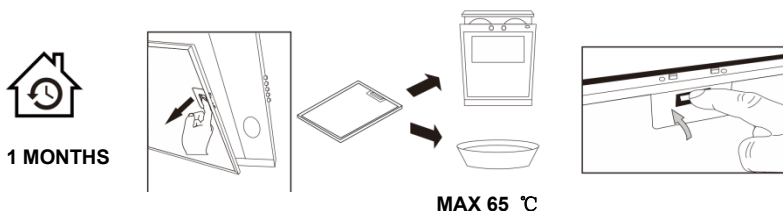

Aluminium filters: To avoid fires, clean thoroughly once a month or whenever the display pilot lights up (if fitted). To do so, remove the filters and soak in hot water and detergent for an hour. If using a dishwasher, position the filters vertically to improve the cleaning process.

VI. Carbon filter life time: Suggest changing to new one every 3 months (According to different kitchen condition, the life time of carbon filter might be longer or shorter than 3 months).

Installation: Fix carbon filter into the unit and turn it in clockwise direction. Repeat the same on the other side.

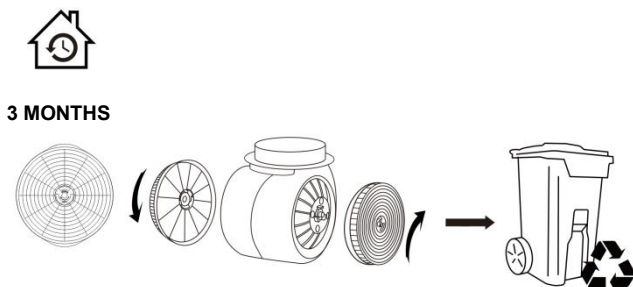

Important Notice:

1. Make sure the filter is securely locked. Otherwise, it would loosen and cause abnormal noise and danger.
2. Using carbon filter would reduce the air flow of the range hood.

TROUBLE-SHOOTING

Fault	Cause	Solution
Light on, but fan does not work	The fan blade is jammed.	Switch off the unit and repair by qualified service personnel only.
	The motor is damaged.	
Both light and fan do not work	Light bulb burn.	Replace the LED light with correct rating.
	Power cord is loose.	Plug into the power supply again.
Serious Vibration of the unit	The fan blade is damaged.	Switch of the unit and repair by qualified service personnel only.
	The fan motor is not fixed tightly.	
	The unit is not hung properly on the bracket.	Take down the unit and check whether the bracket
Suction performance not good	Too far distance between the unit and the cooktop.	Readjust the distance between 650-750mm.

ENVIRONMENTAL PROTECTION

Waste electrical products should not be disposed of with household waste.

Please recycle where facilities exist.

Check with your Local Authority or retailer for recycling advice.

