



SLIDING DOOR SYSTEM

TRACK-PRO

TRACK-PRO

The New Sliding Door System

A Silent Sliding Door For Your Home



- Gentle and smooth door opening and closing thanks to patented soft-closing mechanism
- Double-roller device on damper trigger provides smooth and stable movement and avoids roller disengagement
- Buffer integrated on damper catching device



Quietness



Intelligence



Durability



Eco-Friendliness

TRACK-PRO

CS Series Soft-close Sliding Door System




PRODUCT



DESCRIPTION

- Gentle and smooth door opening and closing thanks to patented damper design
- Effective catching mechanism prevents door disengagement
- Double-roller devise on damper trigger provides smooth and stable movement and avoids roller disengagement
- Stepless adjustment(35-39mm) on guiding rollers interval
- Bottom roller adjustment range:0-12mm
- Damper trigger height adjustment up to 6mm

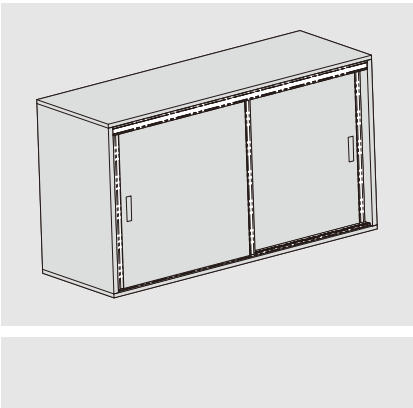

CS TWO-WAY SOFT-CLOSE, INVISIBLE BOTTOM ROLLER, FOR ALUMINUM FRAME DOOR

	Kit Package		
	Door Weight(KG)	Item No.	Set/ctn
	5~15	0CS001A	10
	15~30	0CS001B	10
	30~50	0CS001C	10


0CS001 Kit Package includes:			
2 x damper	2 x damper trigger	2 x bottom roller	2 x dowel

1	Damper (for Alu Door) / Industrial package		
	Door Weight(KG)	Item No.	Pcs/ctn
	5~15	CSHCA1	100
	15~30	CSHCA2	100
	30~50	CSHCA3	100






2	Damper trigger / Industrial package	
	Item No.	Pcs/ctn
	CSBDA	200

3	Bottom Roller / Industrial package	
	Item No.	Pcs/ctn
	CSXLA	100

4	Dowel / Industrial package	
	Item No.	Pcs/ctn
	CSXW01	5000

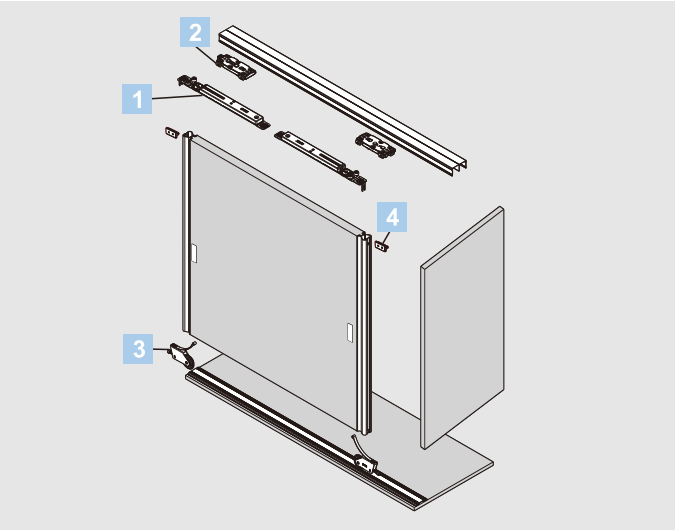

PLANNING

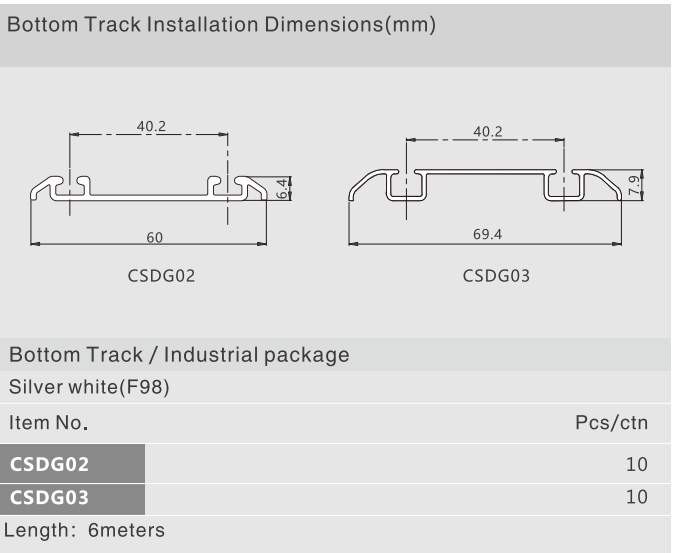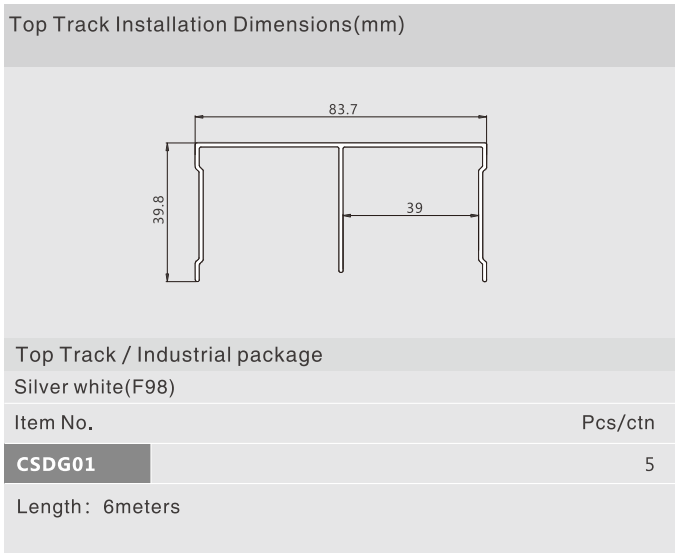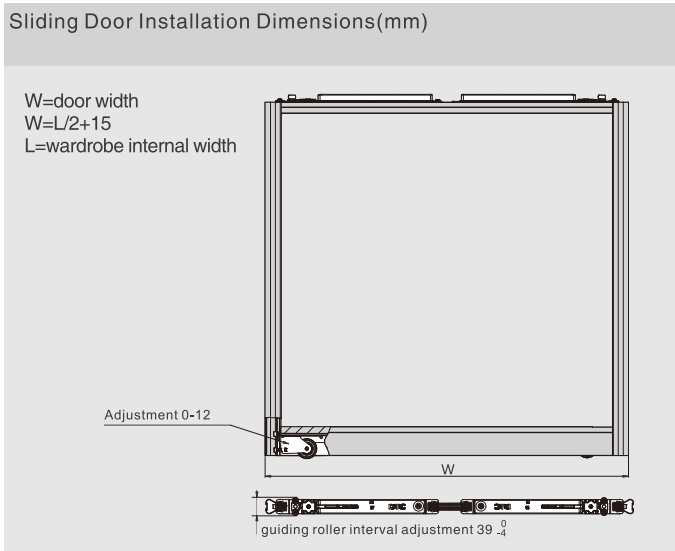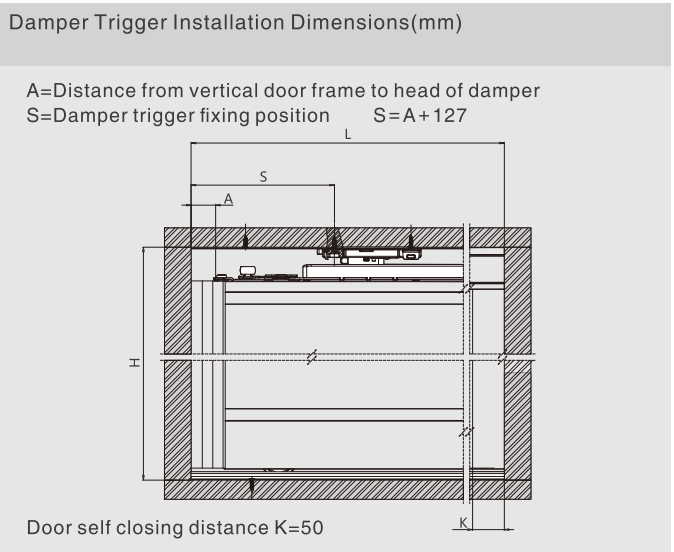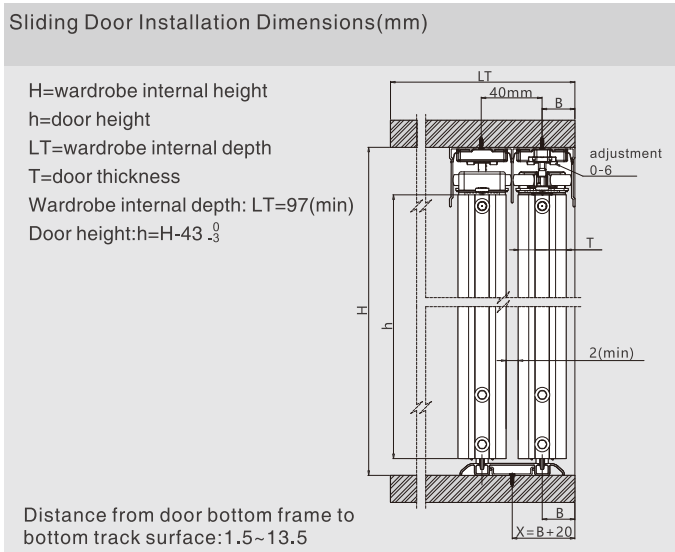

TRACK-PRO

CS Series Soft-close Sliding Door System




PRODUCT



DESCRIPTION

- Gentle and smooth door opening and closing thanks to patented damper design
- Effective catching mechanism prevents door disengagement
- Double-roller devise on damper trigger provides smooth and stable movement and avoids roller disengagement
- Stepless adjustment(35-39mm) on guiding rollers interval
- Bottom roller adjustment range:0-12mm
- Damper trigger height adjustment up to 6mm

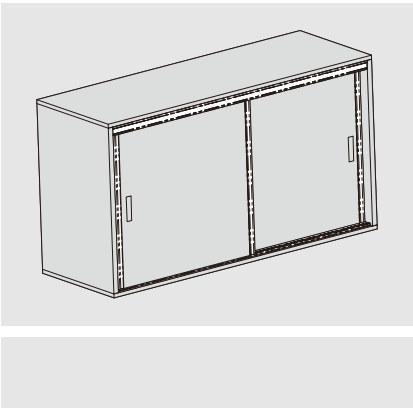

CS ONE-WAY SOFT-CLOSE, INVISIBLE BOTTOM ROLLER, FOR ALUMINUM FRAME DOOR

	Kit Package		
	Door Weight(KG)	Item No.	Set/ctn
	5~15	0CS002A	10
	15~30	0CS002B	10
	30~50	0CS002C	10

0CS002 Kit Package includes:				
1 x damper	1 x top roller	1 x damper trigger	2 x bottom roller	1 x dowel


	Damper(for Alu Door) / Industrial package		
	Door Weight(KG)	Item No.	Pcs/ctn
	5~15	CSHCA1	100
	15~30	CSHCA2	100
	30~50	CSHCA3	100

	Damper trigger / Industrial package	
	Item No.	Pcs/ctn
	CSBDA	200




	Bottom Roller / Industrial package	
	Item No.	Pcs/ctn
	CSXLA	100

	Dowel / Industrial package	
	Item No.	Pcs/ctn
	CSXW01	5000

	Top Roller / Industrial package	
	Item No.	Pcs/ctn
	CSSL-JA	500

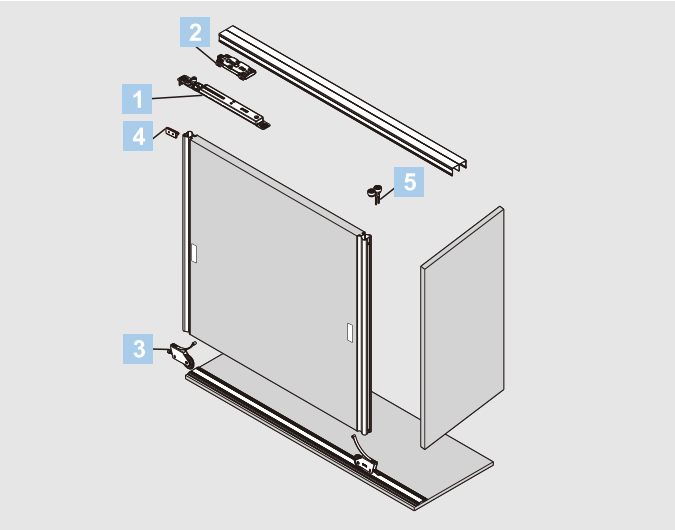

PLANNING

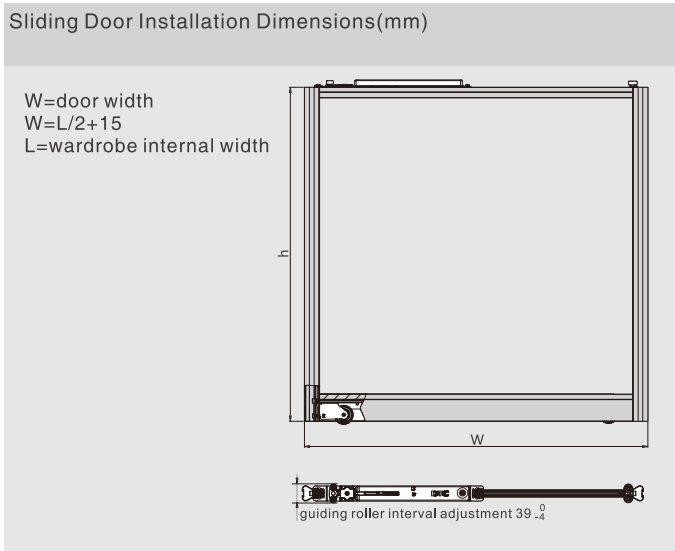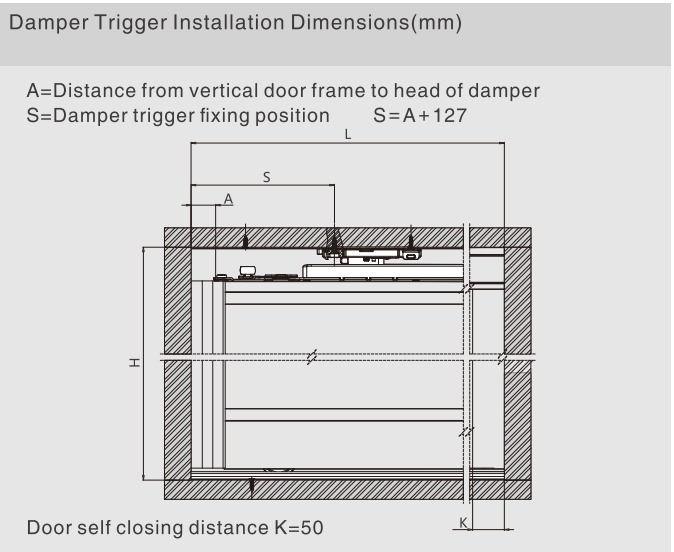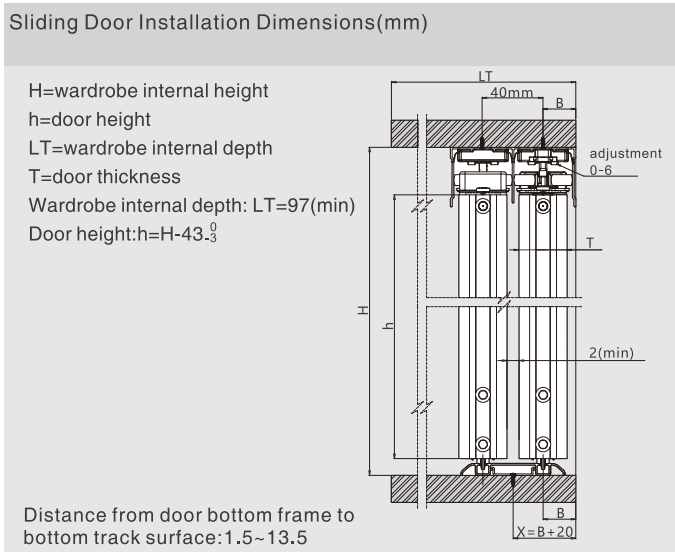

Top Track Installation Dimensions(mm)	
Top Track / Industrial package	
Silver white(F98)	
Item No.	Pcs/ctn
CSDG01	5
Length: 6meters	


Bottom Track Installation Dimensions(mm)	
Bottom Track / Industrial package	
Silver white(F98)	
Item No.	Pcs/ctn
CSDG02	10
CSDG03	10
Length: 6meters	

PRODUCT



DESCRIPTION

- Gentle and smooth door opening and closing thanks to patented damper design
- Effective catching mechanism prevents door disengagement
- Double-roller devise on damper trigger provides smooth and stable movement and avoids roller disengagement
- Sufficient door height adjustments, effecient and convenient adjustments thanks to unique eccentric disc design on bottom roller
- 9mm sprung adjustment, and 4mm eccentric adjustment (totally adjustment 9mm)
- Stepless adjustment(35-39mm) on guiding rollers interval
- Damper trigger height adjustment up to 6mm

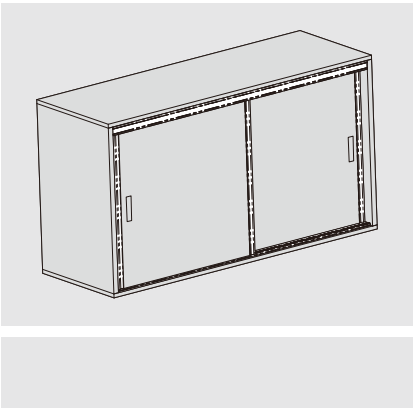

CS TWO-WAY SOFT-CLOSE, INSERT-TYPE BOTTOM ROLLER, FOR WOOD DOOR


	Kit Package		
	Door Weight(KG)	Item No.	Set/ctn
	5~15	OCS003A	10
	15~30	OCS003B	10
	30~50	OCS003C	10

OCS003 Kit Package includes:		
2 x damper	2 x damper trigger	2 x insert-type bottom roller





	Damper (for Wood Door) / Industrial package		
	Door Weight(KG)	Item No.	Pcs/ctn
	5~15	CSHCB1	100
	15~30	CSHCB2	100
	30~50	CSHCB3	100

	Damper trigger / Industrial package	
	Item No.	Pcs/ctn
	CSBDA	200

	Insert-type Bottom Roller / Industrial package	
	Item No.	Pcs/ctn
	CSYLA	200

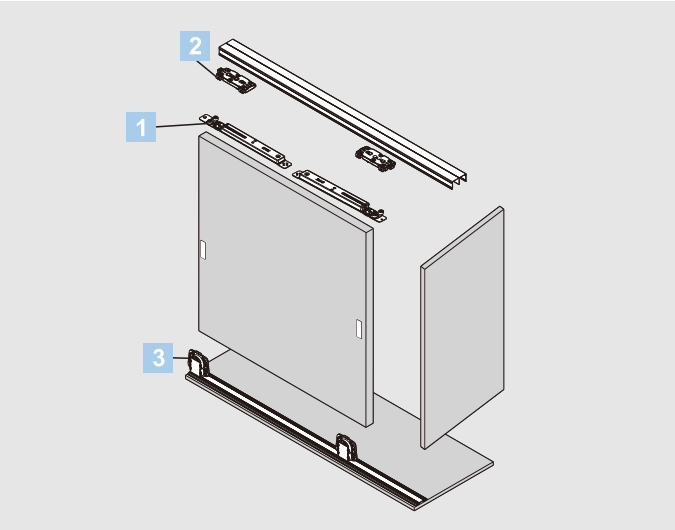

PLANNING

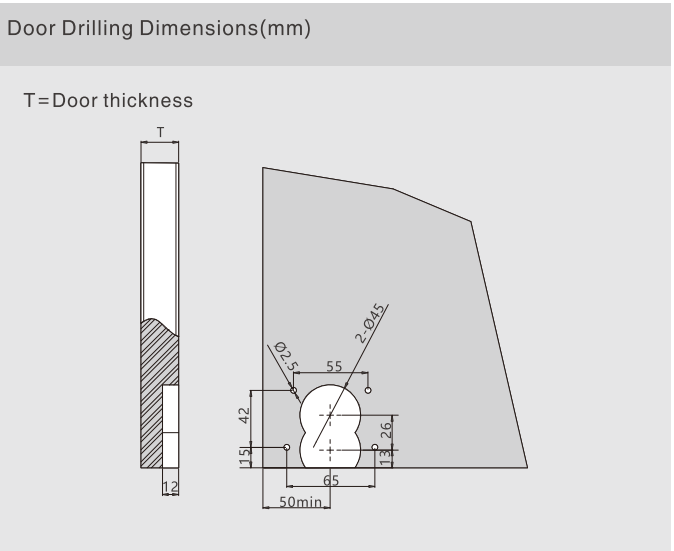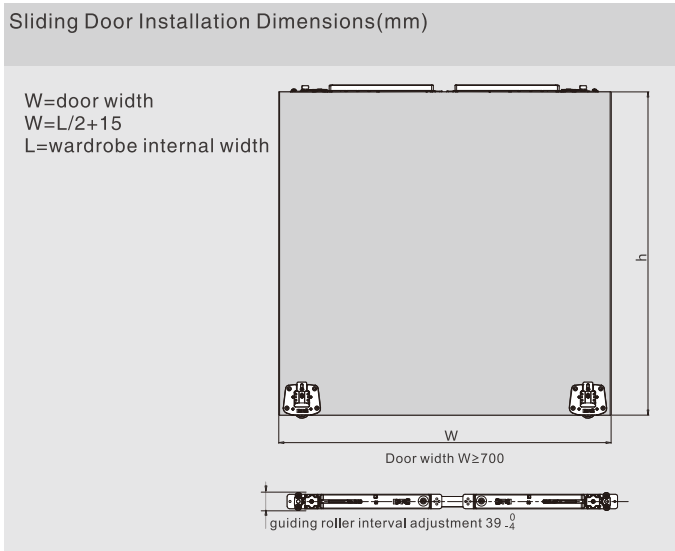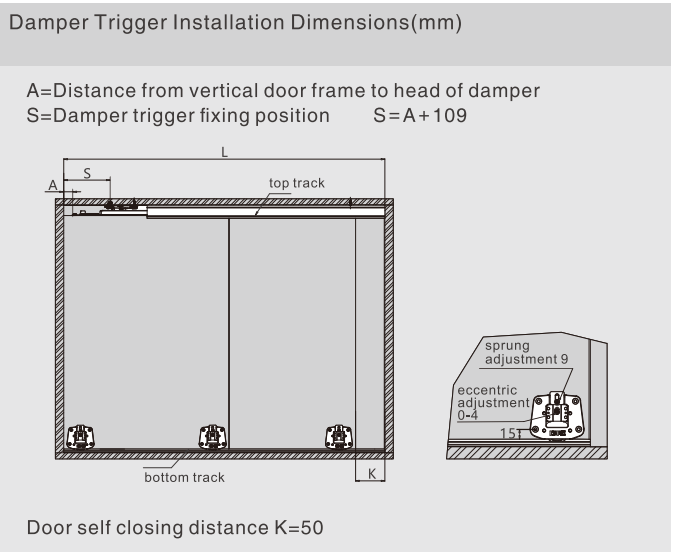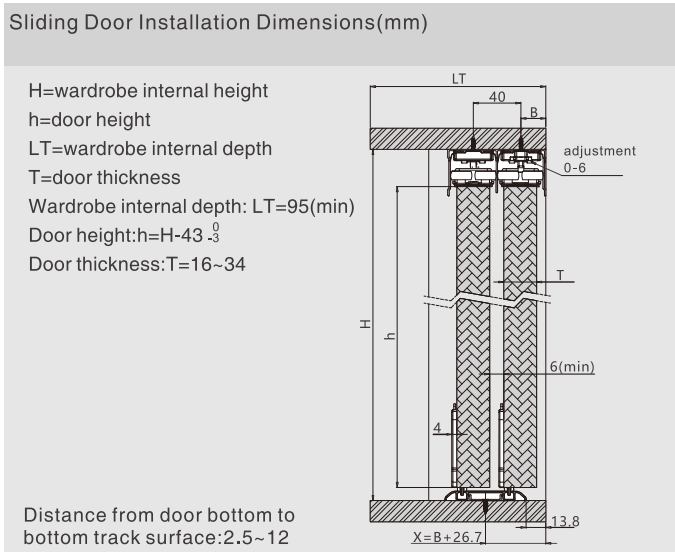

Top Track Installation Dimensions(mm)	
Top Track / Industrial package	
Silver white(F98)	
Item No.	Pcs/ctn
CSDG01	5
Length: 6meters	


Bottom Track Installation Dimensions(mm)	
Bottom Track / Industrial package	
Silver white(F98)	
Item No.	Pcs/ctn
CSDG02	10
CSDG03	10
Length: 6meters	

PRODUCT




DESCRIPTION

- Gentle and smooth door opening and closing thanks to patented damper design
- Effective catching mechanism prevents door disengagement
- Double-roller devise on damper trigger provides smooth and stable movement and avoids roller disengagement
- Sufficient door height adjustments,effecient and convenient adjustments thanks to unique eccentric disc design on bottom roller
- 9mm sprung adjustment, and 4mm eccentric adjustment (totally adjustment 9mm)
- Stepless adjustment(35-39mm) on guiding rollers interval
- Damper trigger height adjustment up to 6mm

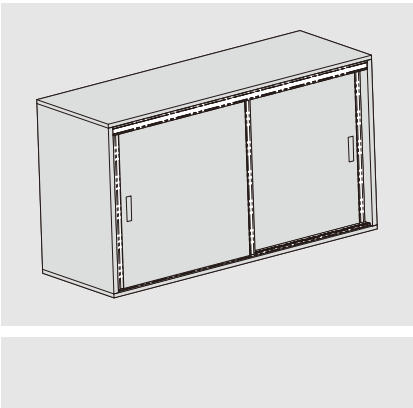

CS ONE-WAY SOFT-CLOSE, INSERT-TYPE BOTTOM ROLLER, FOR WOOD DOOR

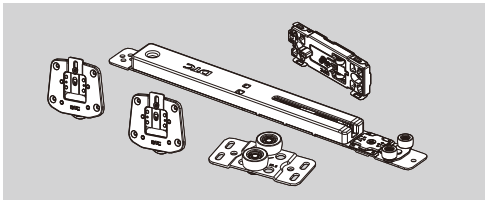

Kit Package			
Door Weight(KG)	Item No.	Set/ctn	
5~15	0CS004A	10	
15~30	0CS004B	10	
30~50	0CS004C	10	

0CS004 Kit Package includes:


1 x damper	1 x damper trigger	2 x insert-type bottom roller	1 x top roller

	Damper (for Wood Door) / Industrial package		
	Door Weight(KG)	Item No.	Pcs/ctn
	5~15	CSHCB1	100
	15~30	CSHCB2	100
	30~50	CSHCB3	100

	Damper trigger / Industrial package		
	Item No.	Pcs/ctn	
	CSBDA	200	

	Insert-type Bottom Roller / Industrial package		
	Item No.	Pcs/ctn	
	CSYLA	200	


	Top Roller / Industrial package		
	Item No.	Pcs/ctn	
	CSSL-PA	200	

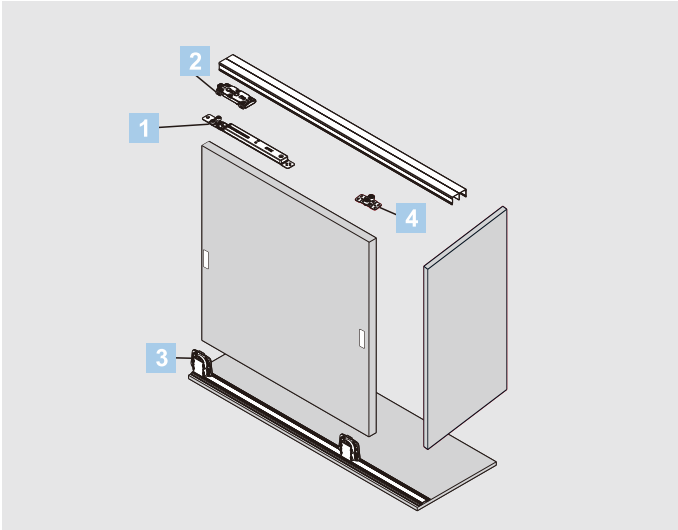

PLANNING

Sliding Door Installation Dimensions(mm)


H=wardrobe internal height
h=door height
LT=wardrobe internal depth
T=door thickness
Wardrobe internal depth: LT=95(min)
Door height:h=H-43⁻⁰₃
Door thickness:T=16~34

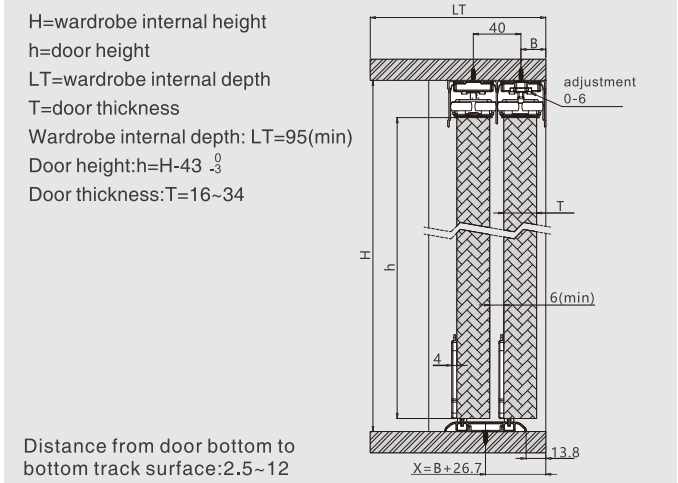

Distance from door bottom to bottom track surface:2.5~12

Sliding Door Installation Dimensions(mm)


W=door width
W=L/2+15
L=wardrobe internal width

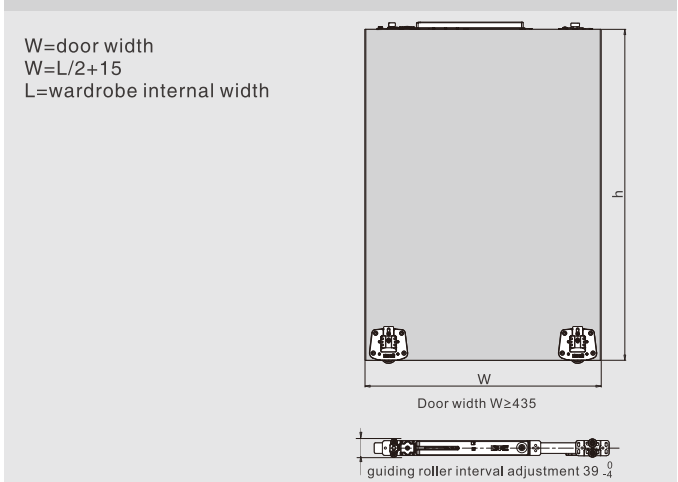

Door width W≥435

guiding roller interval adjustment 39⁻⁰₄

Top Track Installation Dimensions(mm)

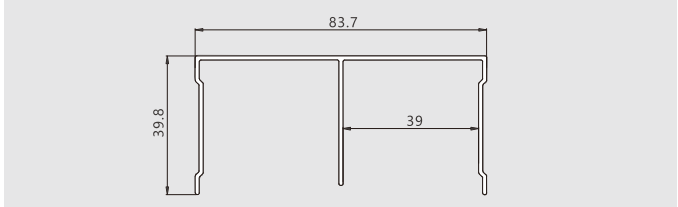


Top Track / Industrial package
Silver white (F98)

Item No.	Pcs/ctn
CSDG01	5

Length: 6meters

Bottom Track Installation Dimensions(mm)

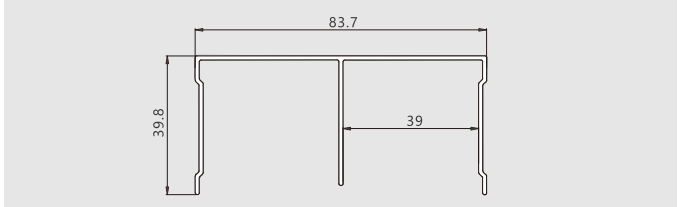


Bottom Track / Industrial package
Silver white (F98)

Item No.	Pcs/ctn
CSDG02	10
CSDG03	10

Length: 6meters

Damper Trigger Installation Dimensions(mm)


A=Distance from vertical door frame to head of damper
S=Damper trigger fixing position S=A+109

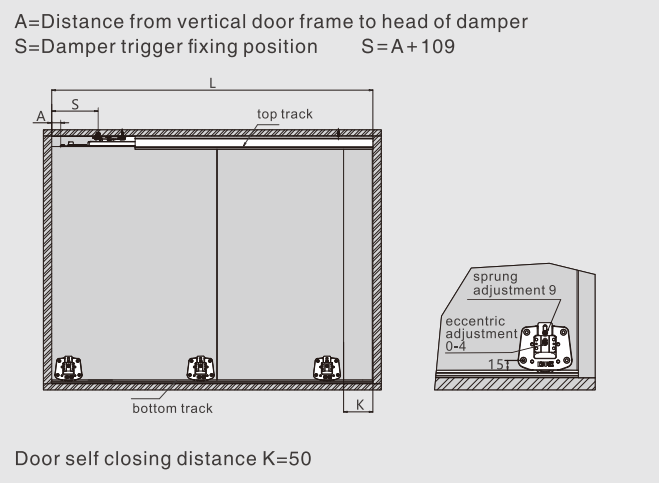

Door self closing distance K=50

Door Drilling Dimensions(mm)

T=Door thickness

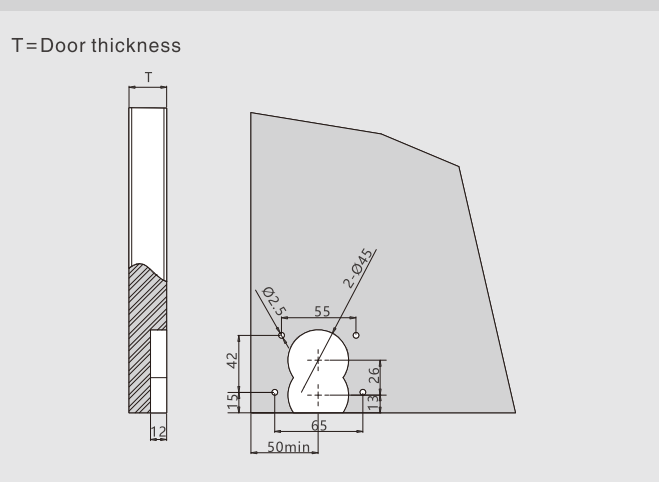

TRACK-PRO

CS Series Soft-close Sliding Door System




PRODUCT



DESCRIPTION

- Gentle and smooth door opening and closing thanks to patented damper design
- Effective catching mechanism prevents door disengagement
- Double-roller devise on damper trigger provides smooth and stable movement and avoids roller disengagement
- Sufficient door height adjustments,effecient and convenient adjustments thanks to unique eccentric disc design on bottom roller
- 15mm sprung adjustment, and 5mm eccentric adjustment (totally adjustment 20mm)
- Stepless adjustment(35-39mm) on guiding rollers interval
- Damper trigger height adjustment up to 6mm

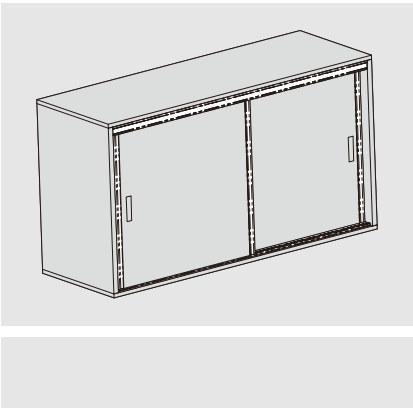

CS TWO-WAY SOFT-CLOSE, SURFACE-MOUNT BOTTOM ROLLER, FOR WOOD DOOR


	Kit Package		
	Door Weight(KG)	Item No.	Set/ctn
	5~15	0CS005A	10
	15~30	0CS005B	10
	30~50	0CS005C	10

OCS005 Kit Package includes:		
2 x damper	2 x damper trigger	2 x surface-mount bottom roller







1	Damper(for Wood Door) / Industrial package		
	Door Weight(KG)	Item No.	Pcs/ctn
	5~15	CSHCB1	100
	15~30	CSHCB2	100
	30~50	CSHCB3	100

2	Damper trigger / Industrial package		
	Item No.	Pcs/ctn	
	CSBDA	200	

3	Surface-mount Bottom Roller Industrial package		
	Item No.	Pcs/ctn	
	CSMLA	100	

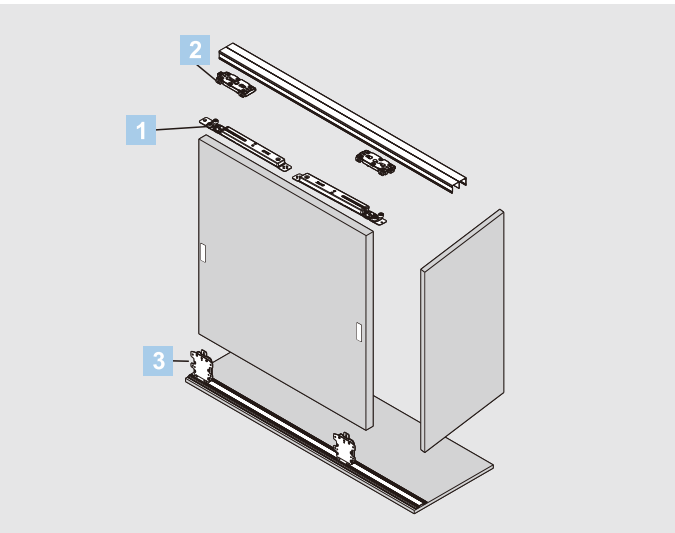

PLANNING

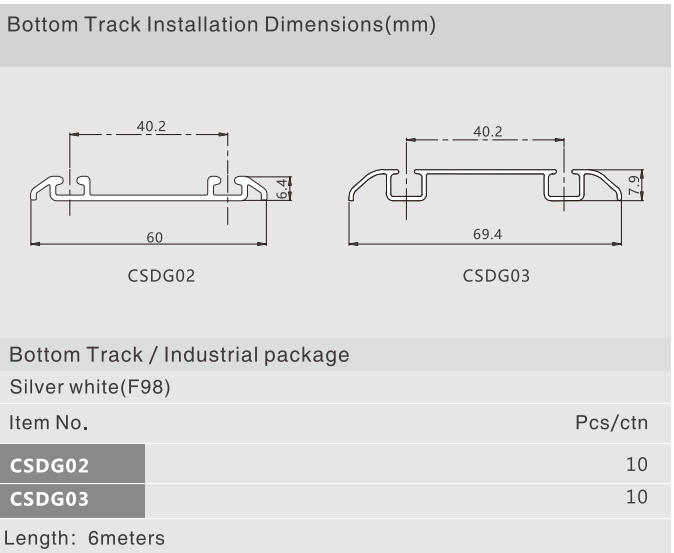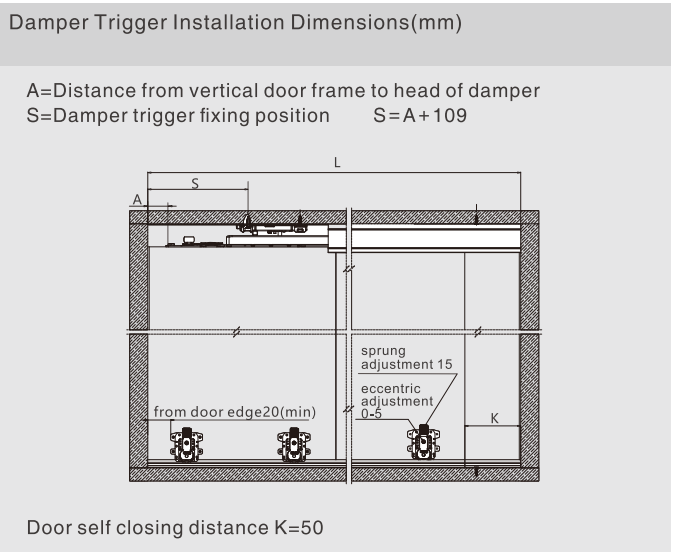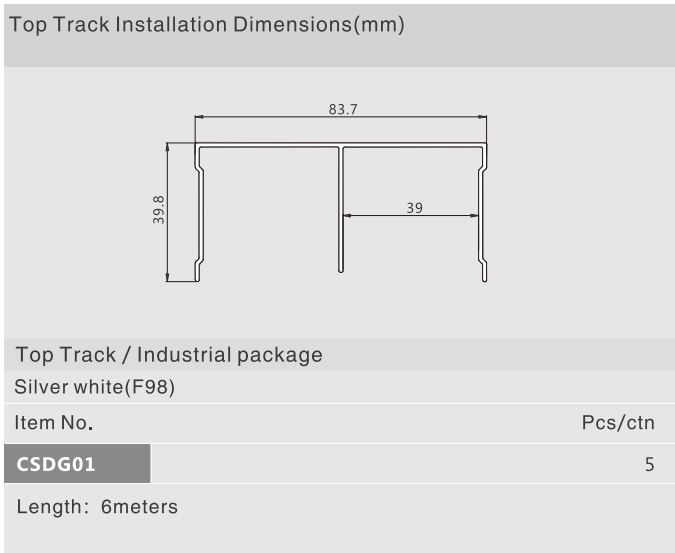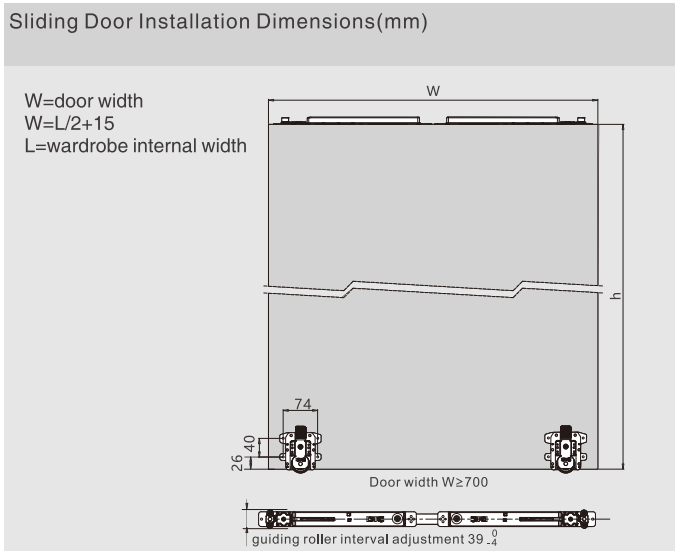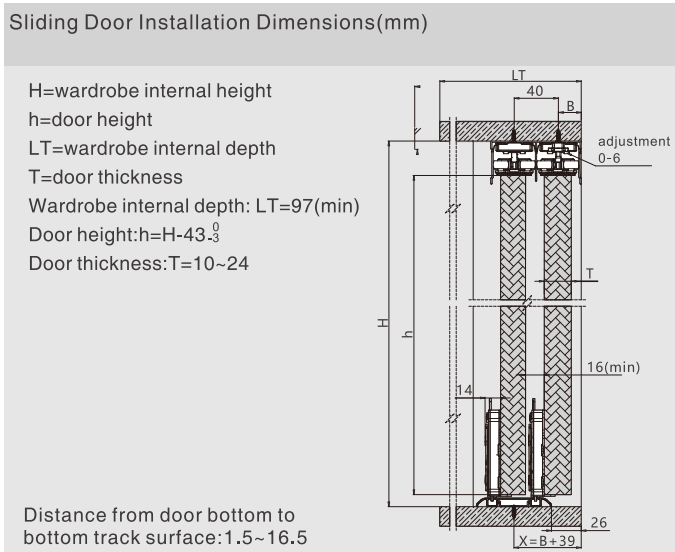

TRACK-PRO

CS Series Soft-close Sliding Door System




PRODUCT




DESCRIPTION

- Gentle and smooth door opening and closing thanks to patented damper design
- Effective catching mechanism prevents door disengagement
- Double-roller devise on damper trigger provides smooth and stable movement and avoids roller disengagement
- Sufficient door height adjustments,effecient and convenient adjustments thanks to unique eccentric disc design on bottom roller
- 15mm sprung adjustment, and 5mm eccentric adjustment (totally adjustment 20mm)
- Stepless adjustment(35-39mm) on guiding rollers interval
- Damper trigger height adjustment up to 6mm

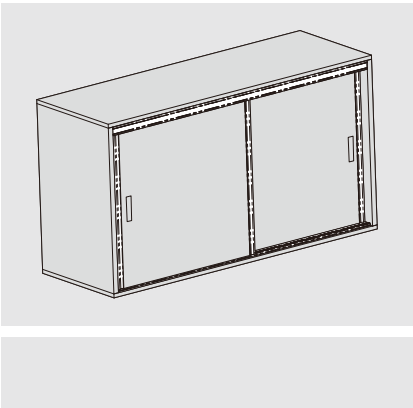

CS ONE-WAY SOFT-CLOSE, SURFACE-MOUNT BOTTOM ROLLER, FOR WOOD DOOR

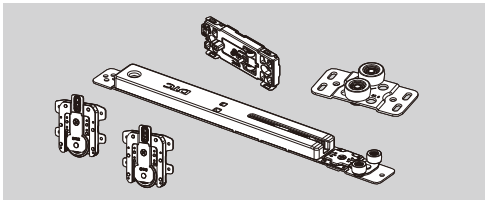

Kit Package			
Door Weight(KG)	Item No.	Set/ctn	
5~15	0CS006A	10	
15~30	0CS006B	10	
30~50	0CS006C	10	

0CS006 Kit Package includes:


1 x damper	1 x damper trigger	2 x surface-mount bottom roller	1 x top roller

Door Weight(KG)	Item No.	Pcs/ctn
5~15	CSHCB1	100
15~30	CSHCB2	100
30~50	CSHCB3	100

Item No.	Pcs/ctn
CSBDA	200

Item No.	Pcs/ctn
CSMLA	100


Item No.	Pcs/ctn
CSSL-PA	200

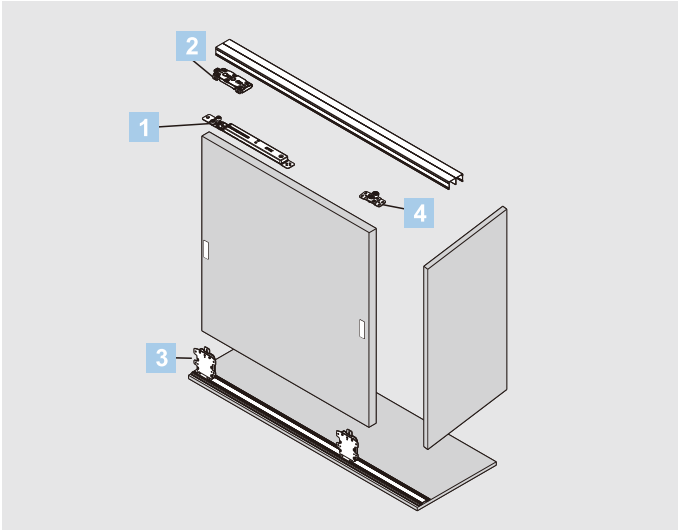

PLANNING

Sliding Door Installation Dimensions(mm)


H=wardrobe internal height
h=door height
LT=wardrobe internal depth
T=door thickness
Wardrobe internal depth: LT=97(min)
Door height:h=H-43⁰
Door thickness:T=10~24

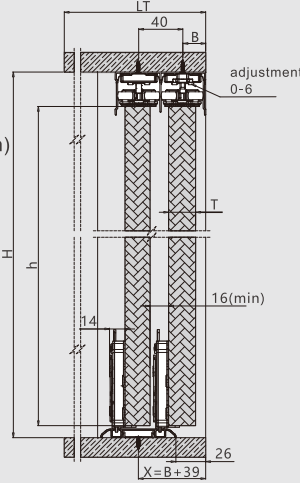

Distance from door bottom frame to bottom track surface:1.5~16.5

Sliding Door Installation Dimensions(mm)


W=door width
W=L/2+15
L=wardrobe internal width

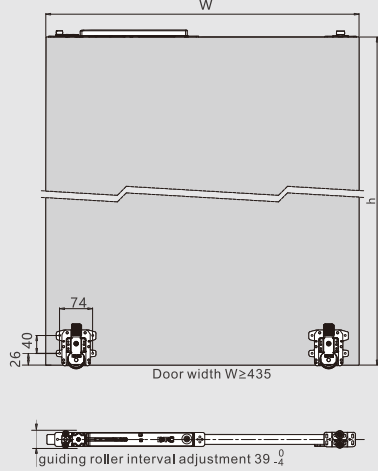

Door width W≥435


guiding roller interval adjustment 39⁺⁰₋₄

Top Track Installation Dimensions(mm)



Top Track / Industrial package
Silver white(F98)
Item No. Pcs/ctn
CSDG01 5
Length: 6meters


Bottom Track Installation Dimensions(mm)

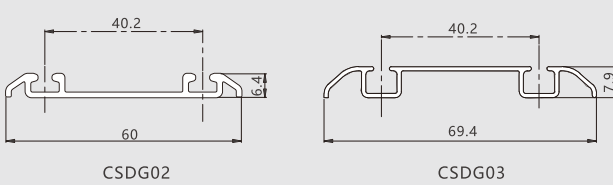

Bottom Track / Industrial package
Silver white(F98)
Item No. Pcs/ctn
CSDG02 10
CSDG03 10
Length: 6meters

Damper Trigger Installation Dimensions(mm)

A=Distance from vertical door frame to head of damper
S=Damper trigger fixing position S=A+109












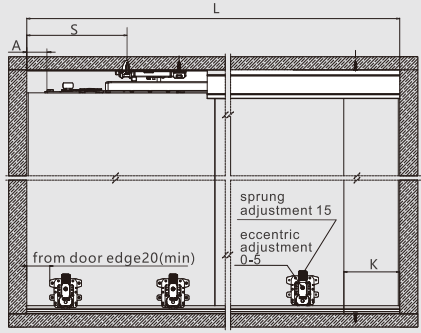


Door self closing distance K=50

TRACK-PRO

CS Series Sliding Door Top Roller Options



ORDER INFORMATION

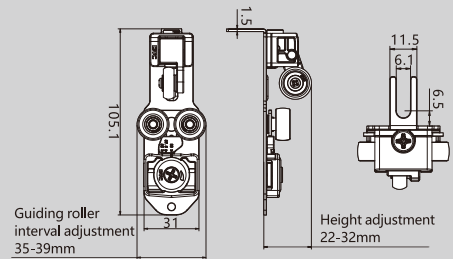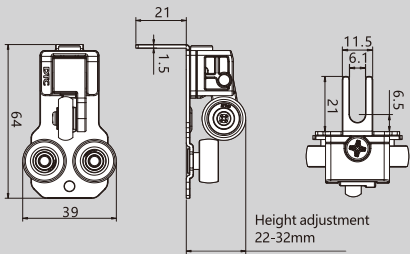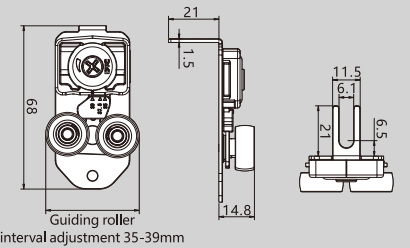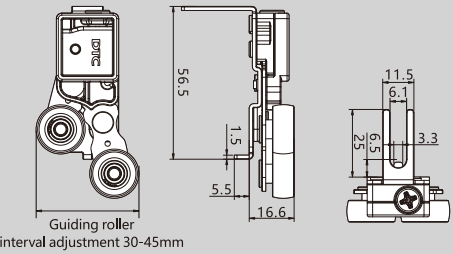

	Top roller / Industrial package		
	Item no.	pcs/ctn	
	OCSTL-A	Zinc Plated(B02) 200	
	Top roller / Industrial package		
	Item no.	pcs/ctn	
	OCSTL-B	Zinc Plated(B02) 200	
	Top roller / Industrial package		
	Item no.	pcs/ctn	
	OCSTL-C	Zinc Plated(B02) 200	
	Top roller / Industrial package		
	Item no.	pcs/ctn	
	OCSTL-D	Zinc Plated(B02) 200	
	Top roller / Industrial package		
	Item no.	pcs/ctn	
	CSSL-JB	Zinc Plated(B02) 300	
	Top roller / Industrial package		
	Item no.	pcs/ctn	
	CSSL-JC	Zinc Plated(B02) 300	



TRACK-PRO

CS Series Sliding Door Bottom Roller Options

ORDER INFORMATION

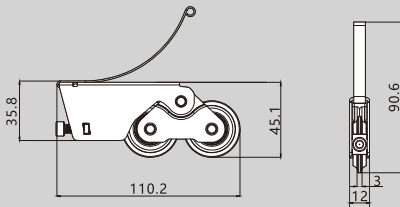	Bottom Roller / Industrial package		
	Item no.	pcs/ctn	
	CSXLC	Zinc Plated(B02) 200	

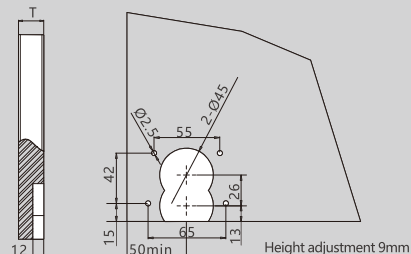	Bottom Roller / Industrial package		
	Item no.	pcs/ctn	
	CSYLC	Zinc Plated(B02) 200	

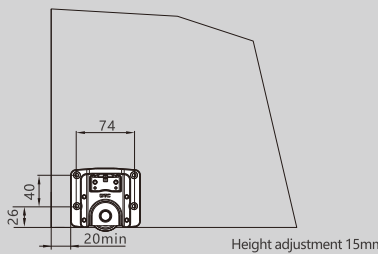	Bottom Roller / Industrial package		
	Item no.	pcs/ctn	
	CSMLC	Zinc Plated(B02) 200	