

PIVOT-STAR

C81 Φ35mm Speed-adjustable Soft-close Angled Hinges




PRODUCT



DESCRIPTION

- Opening angle:55°
- Depth of hinge cup: 11.5mm
- Diameter of hinge cup: 35mm
- Range of door thickness: 14-26mm
- Possible drilling distances on the door(K): 3-7 mm

APPLICATION

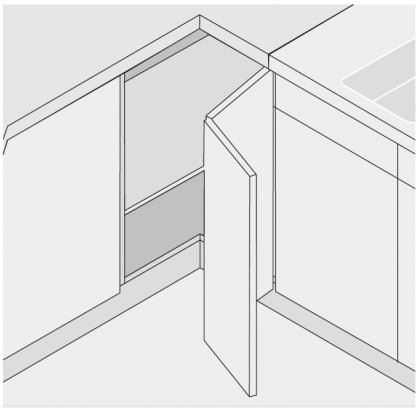

Φ35mm 45° ANGLED HINGE, CORNER DOOR, BI-FOLD DOOR HINGE APPLICATIONS

Kitchen Bi-fold door applications

45°


135°

Kitchen corner door applications

90°

90°

ORDER INFORMATION

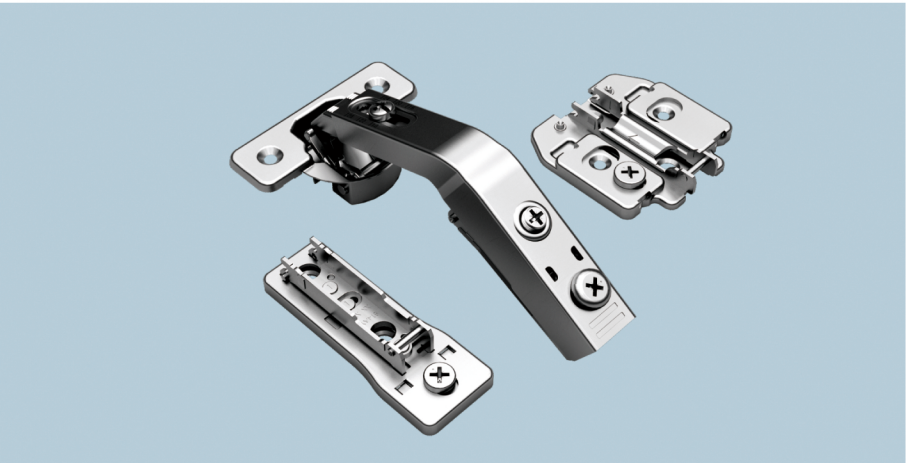

Options of screws and dowels:			
	M10 dowel Dowel No: M		Expandable dowel Dowel No: K
	M8 dowel Dowel No: N		Expandable dowel Dowel No: K0
	Euro screw Dowel No: B		Quick dowel Dowel No: T0

5

7

The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Nickel plated(A01)

Specially treated(A11)

C81 series snap-on angled hinge(two way, cam-adjustable)

135°

Door thickness	Mounting plate height
14≤T < 19	H=2
T=19	H=2
19 < T≤26	H=0

Item No.	Pcs/ctn
Sprung C81H676	200