

WIDE ANGLE SOFT-CLOSING HINGE
(CLIP ON)
OPENING ANGLE 165°

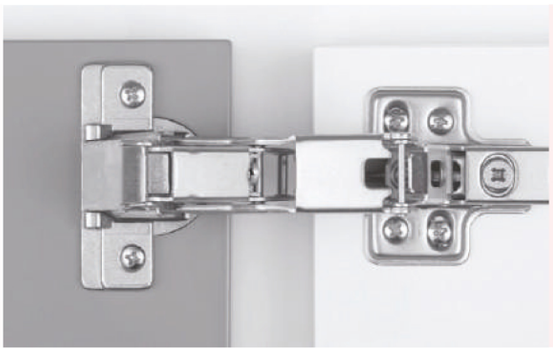

- Metal hinge
- Nickel plated
- Opening angle 165°
- Self-closing with spring (Standard type)
- 3-Dimensional adjustment (with relevant mounting plate)
- Dampner integrated in the hinges body


CUP DIMENSION	45 / 9.5
	


CUP SPACING	45 / 9.5
	

Full Overlay	Cranking 0mm

INSTALLATION DIMENSIONS

Hinge dimensions and gap calculation based on factory setting(mounting plate spacing= 0-9mm) Hinge and door protrusion of full opening angle.

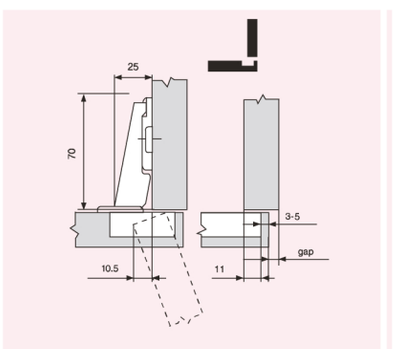



	minimum gap requirement in mm											
drilling dist. : from 3mm	0.8	1.4	1.8	2.2	3.1	4.5	A trial application is					
to 5mm	0.8	1.3	1.5	1.9	2.7	3.8	recommended					
Door thickness in mm	16	18	19	20	22	24	26	28	29	30	31	32

The above figures are based on doors with radiused edges (R=1mm)

Full Overlay

A										
	11	12	13	14	15	16	17	18	19	H
B						3	4	5	6	0
			3	4	5	6				3
	3	4	5	6						5

Half Overlay

A										
	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5	H
B						3	4	5	6	0
			3	4	5	6				3
	3	4	5	6						5

Inset

A					
	-2.5	-1.5	-0.5	0.5	H
B	3	4	5	6	0

A : Door overlay
B : Drilling distance
H : Mounting plate height

Installation



SLIDE-ON



Premounted chipboard screws

